

M-710*i*B Series

Basic Description

The M-710*i*B series is a six-axis, modular construction, electric servo-driven family of robots designed for a variety of manufacturing and system processes. The innovative design of the M-710*i*B series provides an extremely large work envelope without requiring significant floor space.

Engineered for high speed, application flexibility and reliability, the M-710*i*B series delivers repeatable precision and unparalleled performance.

M-710*i*B Series, the Solution for:

- Material handling
- Machine load/unload
- Parts transfer
- Assembly
- Waterjet cutting
- Die casting
- Dispensing
- Material removal
- Palletizing

Benefits

- Floor, invert, wall, shelf and angle mounting permits installation versatility when unusual work piece access is required.

The M-710*i*B/70 supports only floor and invert mounting.



- Shared components between M-710*i*B/45 and M-710*i*B/70 reduce complexity and costs associated with service, spare parts and training.
- Small footprint and slim profile facilitate placement in tight surroundings.
- AC servo motors with high power-to-weight ratios provide an extremely fast composite speed.
- Utilizes the new Alpha *i* servo motors making them more compact and energy efficient.
- Compact body castings provide the smallest Joint 2 interference zone in the industry.
- Wide axis ranges offer the largest horizontal strokes in this robot class.
- Increased flexibility in cell design is realized due to the ability of J3 to flip over and work behind itself.

Features

- 6 axes of motion
- 45 kg payload capacity for the M-710*i*B/45
- 70 kg payload capacity for the M-710*i*B/70
- ± 0.15 mm repeatability
- 360° standard J1 rotation
- Fail-safe brakes on all six axes increase safety, functionality and control.
- Extremely rigid design allows precise positioning.


FANUC
Robotics

Reliability Features


- Sealed drives and bearings minimize maintenance requirements.
- Grease fittings are available on all lubrication points for quick and easy maintenance.
- Cables are routed through hollow RV reducers to minimize flexing.
- All motors and associated cables can be enclosed to prevent snagging and damage from chips, sprays and other hazards.
- Minimal backlash and a long service life are assured by the use of directly coupled drives on all axes instead of pulleys, chains and belts, which can stretch or break.
- In-line wrist design minimizes complexity while increasing reliability.

Major Options

- Air blow and motor fan options for increased duty cycle capability.
- Severe dust and liquid protection package for die cast spray, waterjet cutting and other harsh environment applications.
- Joint 1 and 2 axes motor cover
- Adjustable hard stops for J1 every 15°

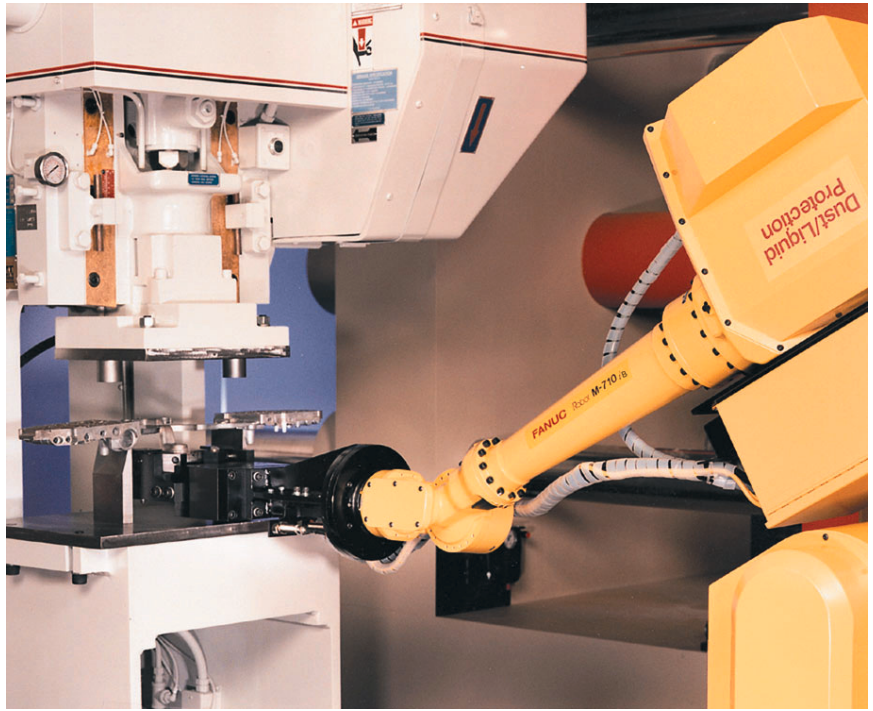


The M-710iB series flip-over capability maximizes reach and flexibility.

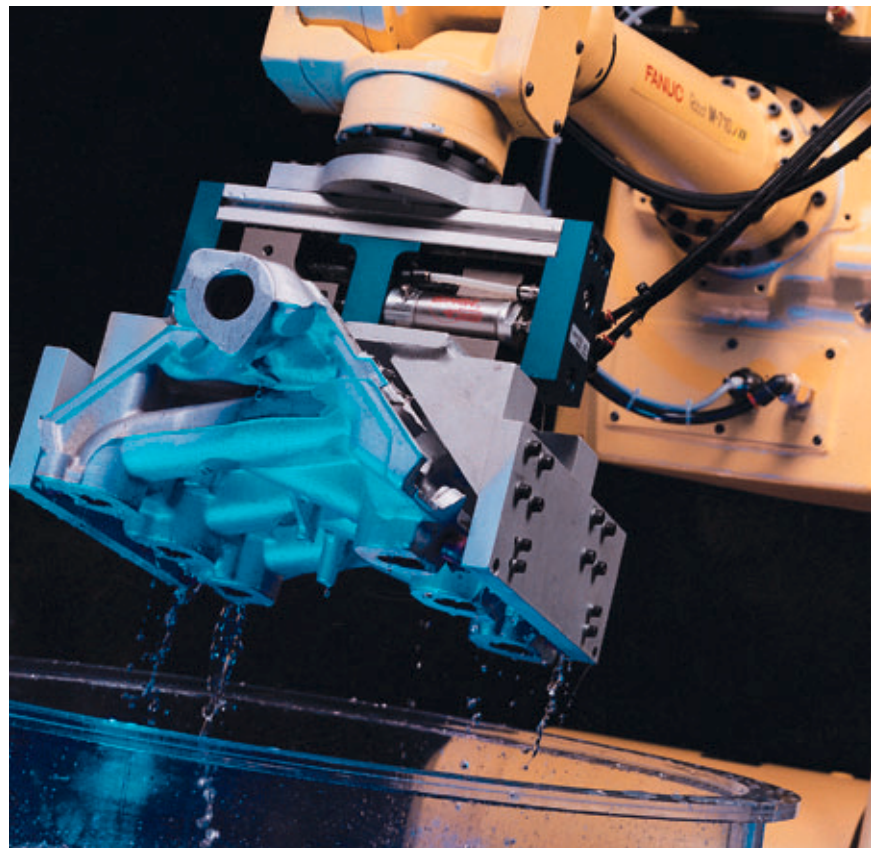

An optional severe dust and liquid protection package allows the M-710iB series to operate in a variety of harsh environments.


M-710iB/45 Dimensions

Isometric



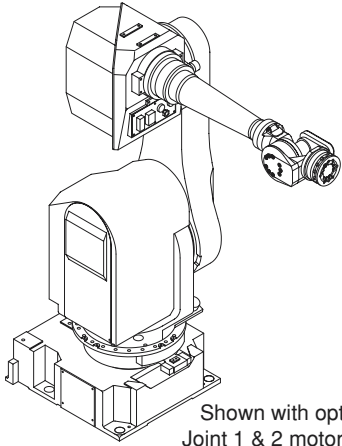


Shown with optional Joint 1 & 2 motor cover.

Top

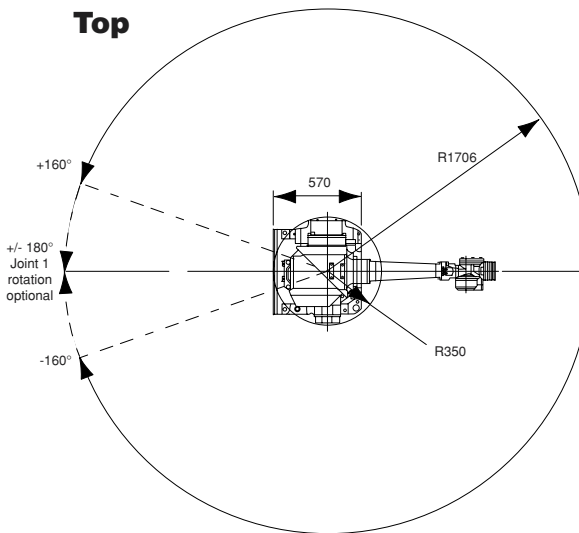

Faceplate

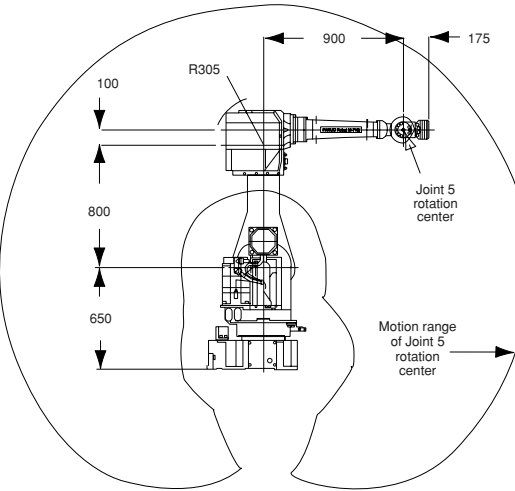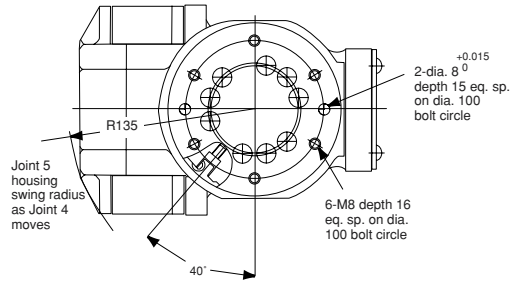

Front


M-710iB/45 Specifications

Items		
Axes	6	
Payload (kg)	45	
Reach (mm)	1706	
Repeatability (mm)	± 0.15	
Interference radius (mm)	350	
Motion range (degrees)	J1	320/360
	J2	260
	J3	420
	J4	540
	J5	250
	J6	720
Motion speed (degrees/sec.)	J1	160
	J2	120
	J3	150
	J4	240
	J5	240
	J6	340
Wrist moment (kgf·m)	J4	18
	J5	18
	J6	10
	J6	10
Wrist inertia (kgf·cm·s ²)	J4	110
	J5	110
	J6	34
	J6	34
Mechanical brakes	All axes	
Mechanical weight (kg)	530	
Mounting method	Floor, ceiling, without Controller (angle and wall) ⁽¹⁾	
Installation environment		
Ambient temperature °C	0 to 45	
Humidity	Normally: 75% or less	
	Short term (within a month): 95% or less No condensation	
Vibration (m/s ²) (G)	4.9 or less (0.5G or less)	
IP Rating(s) ⁽²⁾	Body IP54 Std. (IP55 optional) Wrist and joint 3 arm IP67	

Notes:

- J1 asiz motion range and speed will be derated.
- SDLP Body IP55 wrist and Joint and Arm IP67.

Footprint

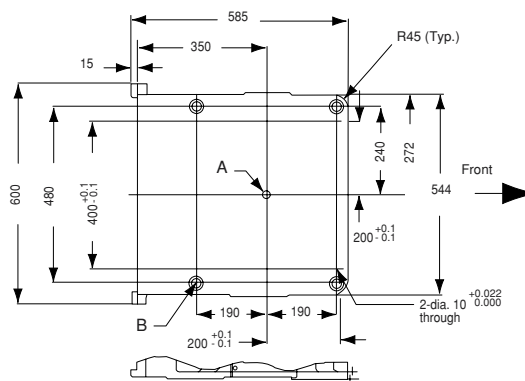

- A: Joint 1 axis rotation center
 B: 4-dia. 24 through dia. 38 facing depth 4 (for robot mounting bolt)

Notes:

Drawings are not to scale.
 Dimensions shown in millimeters.

